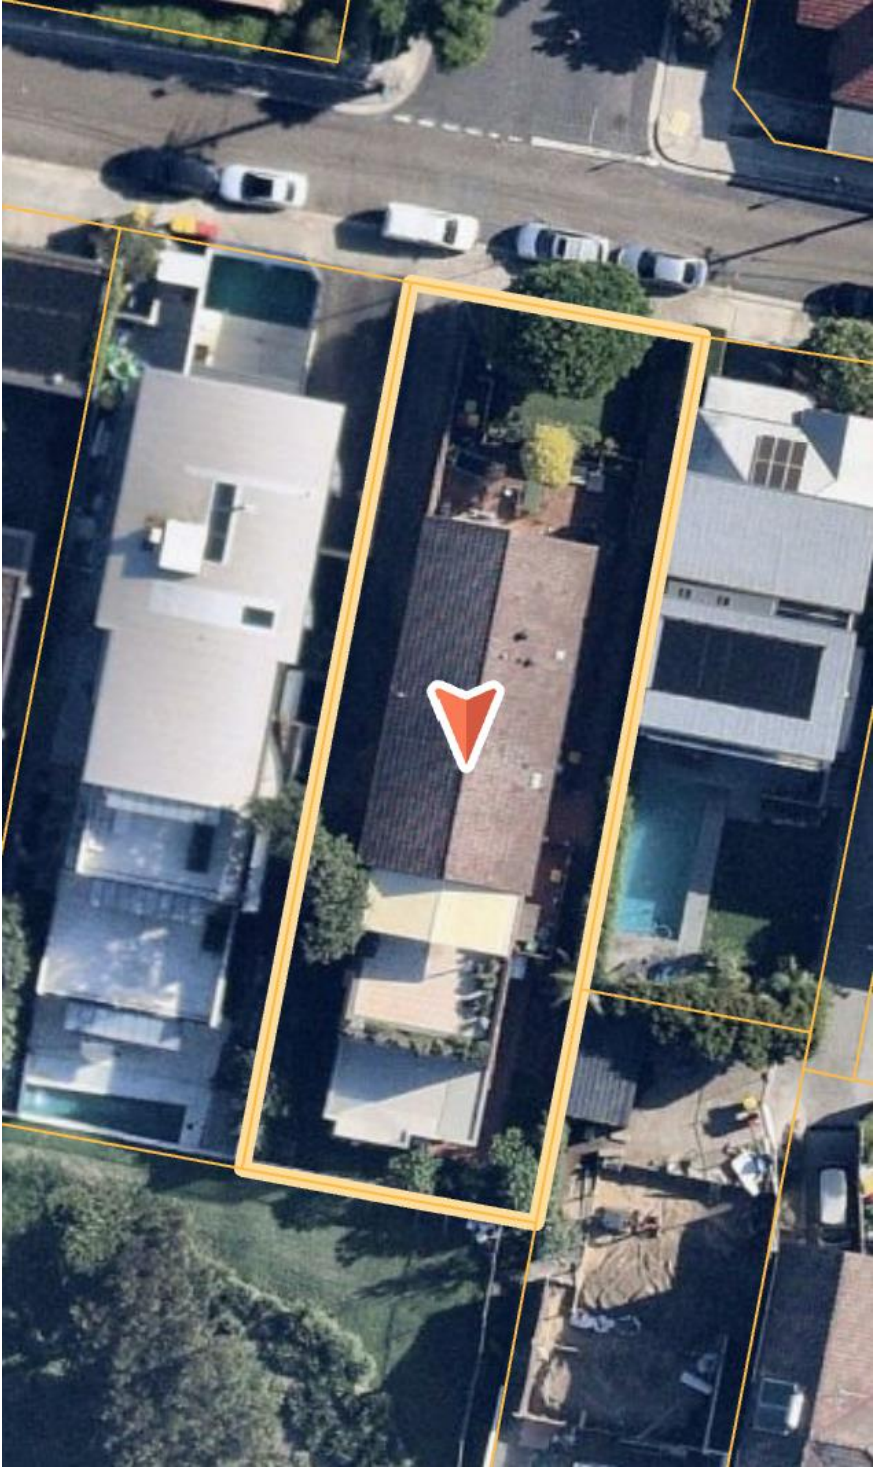


SCOPE OF WORKS	22 Battery Street, Coogee
The contents of this Specification can be summarised as follows: ITEM 1. PRELIMINARIES 2 ITEM 2. HOME BUILDING COMPENSATION FUND INSURANCE (HBCF) 3 ITEM 3. ACCESS 4 ITEM 4. BALCONY, COURTYARD AND WALKWAY WATERPROOFING 5 ITEM 5. DOOR REPLACEMENT 10 ITEM 6. REPLACEMENT OF BALUSTRADE..... 12 ITEM 7. BALUSTRADE WALL REPLACEMENT 14 ITEM 8. BOUNDARY WALL REPLACEMENT 15 ITEM 9. CONCRETE SPALLING REPAIRS 16 ITEM 10. EXTERNAL MASONRY CRACK REPAIRS 18 ITEM 11. REPLACEMENT OF NORTHERN WALKWAY SLAB 19 ITEM 12. OTHER WORKS..... 20 ITEM 13. WINDOW REPLACEMENT 21 ITEM 14. MATERIAL TECHNICAL DATA SHEETS 24 APPENDIX A-WATERPROOFING DRAWINGS	 Figure 1 – Aerial View of 22 Battery Street, Coogee (Courtesy of ‘Near Map’)

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521 NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'. COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.	SCOPE OF WORKS FOR TENDER PURPOSES ONLY		<table><tr><td>JOB TITLE:</td><td>Remedial Building Works – Waterproofing Works and Other Works</td></tr><tr><td>PROPERTY ADDRESS:</td><td>22 Battery Street, Coogee NSW 2034</td></tr><tr><td>PARTRIDGE REMEDIAL REFERENCE:</td><td>2025R0318</td></tr><tr><td>DATE:</td><td>11 June 2026</td></tr><tr><td>PAGE:</td><td>1</td></tr></table>	JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works	PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034	PARTRIDGE REMEDIAL REFERENCE:	2025R0318	DATE:	11 June 2026	PAGE:	1
JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works												
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034												
PARTRIDGE REMEDIAL REFERENCE:	2025R0318												
DATE:	11 June 2026												
PAGE:	1												

ITEM 1. PRELIMINARIES										
LOCATION	All areas applicable to the WUC at 22 Battery Street, Coogee NSW 2034	14) The Contractor shall provide a general builder clean to all work areas shall be completed as part of the disestablishment works; WARRANTIES 15) The Contractor shall provide documents the following NSW Government Statutory warranties and associated product warranties for the works carried out under contract and name the Principal as the beneficiary; <table><tr><td>Warranty Form:</td><td>Duration:</td></tr><tr><td>Building Works Materials and Labour</td><td>2 Years (Minor)</td></tr><tr><td>Building Works Materials and Labour</td><td>6 Years (Major)</td></tr><tr><td>Waterproofing membrane</td><td>20 Years (Product Warranty from Supplier)</td></tr></table> Repairs required during the warranty period will be made without charge to the Principal. DESIGN AND BUILDING PRACTITIONERS ACT (2020) (DBP ACT) REQUIREMENTS: 16) Due to the nature of the building works within this specification, the Contractor shall be a Registered Building Practitioner and ensure that the documents, records, and building works are executed and recorded under the requirements of the DBP Act. DBP ACT (2020) DECLARED DESIGN: 17) Contractor to allow for lodging of the Partridge declared design compliance statement and drawings as required by the Regulated Builders Practitioners Act NSW. NCC (2022) DEEMED-TO-SATISFY AND PERFORMANCE SOLUTION REQUIREMENTS: 18) This specification requires work to be completed using NCC (2022) deemed-to-satisfy solutions where at all possible. Anywhere where a Performance Solution is unavoidable by the Contractor, submission of a NCC compliance performance solution brief and report shall be included and allowed for by the Contractor and their Designer where applicable.	Warranty Form:	Duration:	Building Works Materials and Labour	2 Years (Minor)	Building Works Materials and Labour	6 Years (Major)	Waterproofing membrane	20 Years (Product Warranty from Supplier)
Warranty Form:	Duration:									
Building Works Materials and Labour	2 Years (Minor)									
Building Works Materials and Labour	6 Years (Major)									
Waterproofing membrane	20 Years (Product Warranty from Supplier)									
SCOPE INTENT	The contractor is to provide all necessary preliminary items as specified below.									
SCOPE OF WORKS & SPECIFICATION	The Contractor shall: 1) Further to the Preliminaries in AS4000 – General Conditions of Contract, the Contractor shall install appropriate temporary protection to the common areas and all affected internal areas for the duration of the works to prevent damage to existing property as required; 2) Allow to conduct and provide a dilapidation survey and report of all relevant internal lots and all common areas of the property, including surrounding external walls in the vicinity of the works area prior to commencement. The dilapidation report is to be provided to the Superintendent and the Owners for their records. 3) Provide site fencing and site signage to the property to ensure the safety of both site personnel and residents during the course of the works and for the duration of the project in accordance with Workplace Health and Safety Regulations; 4) Provide traffic control during site deliveries and on-site plant operation as required. 5) Ensure the site is kept clean and tidy with all waste materials contained in a designated storage area. The Contractor is to ensure all waste materials/debris are cleaned and disposed of accordingly prior to leaving the site at the end of each day; 6) Provide protection to nearby electrical wires by the use of “Tiger Tails”, if required. It is the responsibility of the Contractor to identify the possible need for such protection and allow for installation and dismantling costs (at the completion of the works) if required, within this project item; 7) The Contractor shall provide the necessary protection to adjacent surfaces and common property; 8) The Contractor is responsible in ensuring the site area requirements do not affect the access and egress requirements of the residents of the property throughout the duration of the specified and contracted works; 9) The Contractor shall reinstate and reconnect all removed, altered or damaged, services, equipment, surfaces and any other items affected by external access works. The Contractor shall allow provisions to engage licensed electricians, plumbers and any other specialists to reinstate any services affected by remedial works outlined in this specification; SITE ESTABLISHMENT/DISESTABLISHMENT PROVISIONS: 10) The Contractor shall provide to the Owners in detail, the Site Establishment requirements in order to undertake the specified works; 11) If any lot owner car parking spots and or garage spaces are required to be accessed in order to complete the remedial works, the Contractor shall provide sufficient notice to the Owners Corporation for access to the identified car parking spots. The duration of the car parking unavailability is to be provided to the Owners Corporation by the Contractor. 12) The Contractor shall price to work on-site as per Local Council Requirements. The Contractor is responsible to confirm working hours requires with the Council, if required; 13) The Contractor shall allow for any disestablishment works to safely remove all equipment from the site;									

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521 NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'. COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.	SCOPE OF WORKS FOR TENDER PURPOSES ONLY		<table><tr><td>JOB TITLE:</td><td>Remedial Building Works – Waterproofing Works and Other Works</td></tr><tr><td>PROPERTY ADDRESS:</td><td>22 Battery Street, Coogee NSW 2034</td></tr><tr><td>PARTRIDGE REMEDIAL REFERENCE:</td><td>2025R0318</td></tr><tr><td>DATE:</td><td>11 June 2026</td></tr><tr><td>PAGE:</td><td>2</td></tr></table>	JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works	PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034	PARTRIDGE REMEDIAL REFERENCE:	2025R0318	DATE:	11 June 2026	PAGE:	2
JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works												
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034												
PARTRIDGE REMEDIAL REFERENCE:	2025R0318												
DATE:	11 June 2026												
PAGE:	2												

ITEM 2. HOME BUILDING COMPENSATION FUND INSURANCE (HBCF)		
LOCATION	The property at 22 Battery Street, Coogee NSW 2034	Blank.
SCOPE INTENT	This item of work relates to the Contractor obtaining HBCF Insurance documents required for the remedial building works.	
EXTENT OF WORKS	All work areas required to complete the works within this specification.	
SCOPE OF WORKS & SPECIFICATION	For tendering purposes, a Provisional Sum amount will be included in the Tender Schedule for this work item. It is noted that the Home Building Compensation Fund (HBCF) Insurance policy amount is a direct cost that is to be passed onto the Principal. The Contractor must not put on any builders’ margin, overheads, profits or administration costs for obtaining the required insurance documents (initially) under this work item. <u>The Contractor shall:</u> Only upon selection of the Successful Tenderer by the Principal (Client) and approval to proceed to Contract documents 1) Obtain necessary Home Building Compensation Fund (HBCF) Insurance documents for all building works; Note: In accordance with the Home Building Act 1989, the Contractor must obtain a Home Building Compensation Fund (HBCF) Insurance policy for all building works provided the total cost of the works exceeds \$20,000.00 (GST included). The certificate of insurance is to nominate the address of the site and the Principal as the beneficiary. 2) Provide a copy to the Principal and Superintendent of the issued Home Building Compensation Fund (HBCF) Insurance policy once received; a) Electronic copies (via email) or Hard Copies of the documents are both acceptable forms of providing the policy to the required parties as stated above. 3) In the event of a change in contract value (or sequential/cumulative variations) of greater than 20% of the original contract price, the Home Building Compensation Fund (HBCF) policy must be modified to align with the Final Contract value; In this event that this is required, the Contractor must submit to the Client a Variation Request for the additional Home Building Compensation Fund (HBCF) premium costs incurred, and any additional Broker costs (if relevant) which are required to close out the Home Building Compensation Fund (HBCF) Insurance documents with the provider. The Contractor shall provide all documentation and receipts associated with the change in premium and broker costs to the Client for their review and records.	

ITEM 3. ACCESS		
LOCATION	Walkway, Ground floor courtyards at 22 Battery Street, Coogee.	
SCOPE INTENT	The scope intent of this work item is to ensure safe access for all works.	
EXTENT OF WORKS	For tendering purposes, the Contractor shall allow for a lump sum price for the scoped roof waterproofing and associated remedial works.	
SCOPE OF WORKS & SPECIFICATION	Establishment, Disestablishment, and General Access requirement 1) The contractor is solely responsible for the provision of safe access for all works; 2) All scaffolding and access system equipment, installation, certification, attendance, etc; 3) The contractor is to provide additional access system provisions as required for the works to be conducted; 4) Access is to be conducted in such a way that disturbance to Users is minimised; 5) Protect all areas that might get damaged during the remedial work; 6) Access is to be conducted in accordance with all relevant standards and codes; 7) Provided access shall not unduly compromise the building or lot security; 8) Reasonable measures shall be taken to prevent unauthorised access; 9) Access is to be maintained for all Users during any works unless otherwise stipulated; 10) Amenity to Users is to be maintained and inconvenience minimised; 11) Organising and co-ordination of access providing sufficient and reasonable notice; 12) No access is available through units or common hallways at any time. All the arrangements for the works should be done externally via scaffold.	

Blank.

ITEM 4. BALCONY, COURTYARD AND WALKWAY WATERPROOFING

LOCATION	Balcony, Courtyard and Walkway at the subject property
SCOPE INTENT	The scope intent of this work item is to: i. Install a new compliant waterproofing membrane and tiling to the nominated external balcony, courtyard and walkway in accordance with <i>AS 4654.2:2012 Waterproofing membranes for above ground use</i>.
EXTENT OF WORKS	For tendering purposes, The Contractor shall allow for a Lump Sum price for the scoped external balcony waterproofing and associated works to the extent specified in
SCOPE OF WORKS & SPECIFICATION	Note: Works are to be staged in such a way that any openings in the building, are left unprotected for minimal time. Any occupant disruption shall be kept to a minimum. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. This Specification is to be read in conjunction with <u>Waterproofing Works Drawing Set</u>. <u>The Contractor shall:</u> 8) Coordinate safe access with Strata Manager and Owners to the work areas at the property as per relevant <i>Item 1 and Item 3 – Preliminaries and Access</i> sections of this Specification document; 9) Coordinate works with other items within this Specification as required; <u>Demolition</u> 10) Owners to temporarily remove any existing external and internal blinds/curtains and/or existing fixtures affecting the existing doors and safely store for re-use. Owners to reinstate at the completion of the works; If in the event that owners have not removed internal blinds/curtains and/or existing fixtures, contractors to remove items based on hourly rates. Contractors not be held liable for damage to items if engaged to remove on behalf of owners. 11) Owners to temporarily remove any planter boxes and soil/plants from balcony and private courtyards. Owners to reinstate at the completion of the works; If in the event that owners have not removed planter boxes and soil/plants, contractors to remove items based on hourly rates. Contractors not be held liable for damage to items if engaged to remove on behalf of owners. 12) <u>Allow to demolish the following:</u> - <u>existing planter box walls along walkway and remove plants and soil</u> - <u>rear boundary wall and reinstate</u> - <u>eastern boundary wall and reinstate</u> - <u>existing walkway concrete slab and associated tiling (From Street to Gate only) and reinstate</u> - <u>existing brick wall between Unit 1 courtyard and walkway and reinstate</u> - <u>Unit 2 Colourbond pergola</u> 13) Allow to decommission and temporarily relocate any existing services (for example: conduits, air conditioning units, taps, gas outlets and light fixtures) as required and recommission upon the completion of the works. Contractor to check operation before disconnecting; a) Contractors are to ensure the Air-conditioning units remain in service throughout the works.

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY



JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	5

ITEM 4. BALCONY, COURTYARD AND WALKWAY WATERPROOFING

- 14) Remove and dispose of all tiles, screed layers, and existing waterproofing membrane to expose the bare concrete substrate;
a) For tender purposes, allow to remove an average screed thickness of 75mm.
- 15) Remove and dispose of all existing door suite(s) assembly;
a) Allow to implement safety protection to affected balconies and door openings during the works;
- 16) Prepared balcony substrates to be free of any loose mortar, grease, oil and any contaminants;
- 17) **ENGINEERING HOLD POINT: Inspection of Substrate and Termination Details:**
a) Contractor to provide surveys of substrates to engineer
b) The Contractor shall give the Superintendent a minimum of 48 hours’ notice to inspect all substrates once exposed, prior to any waterproofing membrane application. The Superintendent shall confirm the quantity of any substrate repairs, if required;
c) The Superintendent shall investigate all external balcony walls, building opening thresholds and service penetrations to confirm the final extent of waterproofing terminations required;
d) The Superintendent shall inspect the proposed membrane termination heights for all external walls and building openings, including doors and flashing requirements to confirm if the specified details are compliant and suitable;
e) Allow for CCTV investigations of the existing balcony drains;
- Construction of concrete walls, plinths and hobs**
18) Construct a new continuous concrete threshold hob to the balcony/courtyard/walkway door opening;
19) Construct a new continuous concrete perimeter hob to the balcony;
20) Construct a new concrete plinth around service penetrations of the balcony;
Details of Concrete Hobs At Threshold:
a) Dimensions: Refer to the drawings, and/or to be confirmed by the Superintendent;
b) Reinforced with Galv. N12 bars drilled and epoxy 120mm into the slab at 200mm c/c, and Galv N12 tie bars;
c) Concrete strength of min. 40MPa; Reinforcement placed centrally to hob;
Details of Concrete Hobs Under Balustrades:
d) Dimensions: Refer to the drawings, and/or to be confirmed by the Superintendent;
e) Reinforced with Galv. 2N12 U Bars drilled and epoxy 120mm into the slab at 200mm c/c, and Galv 2N12 Horizontal tie bars;
f) Concrete strength of min. 40MPa; with Min. 40mm cover,
Details of Concrete Walls
g) Dimensions: Refer to the drawings, and/or to be confirmed by the Superintendent;
h) Reinforced with Galv. N12/N16 bars drilled and epoxy 120mm into the slab at 200mm c/c, and Galv N12 tie bars;
i) Concrete strength of min. 40MPa; Reinforcement placed centrally to hob;

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY



JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	6

ITEM 4. BALCONY, COURTYARD AND WALKWAY WATERPROOFING

Preparation –

- 21) Carry out Concrete Spalling Repairs section of this Specification if required. The concrete surface substrate shall be made seamless to ensure adhesion of a new external waterproofing membrane and or external paint coating;
- 22) Allow to patch repair any minor surface irregularities with **ARDEX BR 345** concrete repair mortar;
- 23) Supply and install 2 coats of protective slurry coating of **ARDEX WPM 405** to all exposed concrete substrate in accordance with the manufacturer’s instructions;
- 24) Install 2 (two) new overflow outlet to the concrete perimeter hob as per the drawing;
- 25) Allow for overflows to be 65mm diameter pipes or 100x75 Rectangular Hollow Section.
- 26) Mechanically fix a new continuous aluminium angle to the new concrete hob of door threshold in accordance with *AS4654.1*, ensure a minimum 100mm vertical waterproofing membrane termination; Penetrations to be certified by the contractor.
 - a) Angles shall be colour matched to the new door frame colour;

Bonded Screed

- 27) Supply and install a bonded screed to the entire external balcony with a minimum of 1:80 falls to the drainage outlets in accordance with *AS4654.2*
 - a) Allow for the addition of **ARDEX WPM 405** polymer additive for Sand Cement Screeds mix;
 - b) For tender purposes, ensure an average screed installation thickness of 75mm;
 - c) Install Galvanised reinforced mesh **SL41** where thickness is more than 40mm;
 - d) Allow a minimum of 7 days curing of screed, contractor to protect screed from inclement weather and UV rays as required;

Waterproofing Membrane Works

- 28) Supply and install a new fully bonded **ARDEX WPM 1000** membrane or approved similar in accordance with the manufacturer’s specification, guidelines, *NCC* and *AS4654.2*;
 - a) Adhere membrane to the substrate with **ARDEX WA 98** adhesive;
 - b) Install a neutral cure sealant **ARDEX RA040** fillet joints at all changes of direction, including edge of puddle flange, angles etc and allow to cure.
 - c) Terminate membrane to the top of aluminium water-stop angle at the door threshold sealed with **ARDEX ST**;

Note: All membranes to be detailed and terminated in accordance with the drawings;

- 29) Remove existing pergola in Unit 2 and replace with like for like new pergola.
- 30) Upon completion of the waterproofing membrane installation, the Contractor must
 - a) Allow for electronic leak detection testing and certification. Any leaks identified shall be made good by the Contractor at their cost;
 - b) Engage *Ardex Australia* for inspection and certification of the waterproofing membrane work.

Cavity Flashing Works

Blank.

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY



JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	7

ITEM 4. BALCONY, COURTYARD AND WALKWAY WATERPROOFING

- 31) Remove a minimum of 2-3 rows of external brickwork as required to allow for the installation of new cavity flashings. The works are to be carried out in alternate 1,200mm sections;
- 32) Ensure propping is installed to support the brickwork wall for the duration of the cavity flashing works;
- 33) Remove and dispose of all existing flashing material and debris (if any) from the cavity wall;

a) The Contractor shall give sufficient notice to the Superintendent (minimum 48 hours) so that the exposed cavity can be inspected prior to the installation of the cavity flashing;

Note: The Contractor shall take photographic records of any debris in the cavity prior to removal;
- 34) Allow to fill the cavity with a 3:1 sand-cement mix with an **ARDEX WPM 405** additive;
- 35) Cut in and seal a new fully bonded **ARDEX WPM 1000** flashing to extend across the cavity wall and turn down on the outside skin of brickwork in accordance with AS3700;
- 36) Ensure that all new cavity flashing works have been completed in accordance with *AS2904:1995 Damp Proof Courses and Flashings*;

a) Cavity flashing shall be installed and embedded into internal masonry skin and sealed in accordance with the drawings;

b) Cavity flashing shall extend through to the external masonry skin and downturn to the waterproofing membrane in accordance with the drawings;

c) Cavity flashing shall extend a minimum of 150 mm to both sides past the opening;

d) Cavity flashing shall turn up minimum one course of brick, boxed and terminated at each end;

Note: The Contractor shall take photographic records ALL completed cavity flashings;
- 37) Supply and install new PVC weep holes to the flashing repair areas at maximum 1,200mm centres in accordance with the manufacturer's Instructions and *AS3700* requirements;
- 38) The Contractor may opt to re-use bricks if salvageable. If not possible, the Contractor must allow for the supply costs of any new bricks required in their lump sum cost for the works;

a) Install new mortar of exposure class M4 and colour matched with existing mortar colour;

b) Ensure that the cavity flashing is protected from any mortar or debris;
- 39) Allow to clean affected areas with a diluted hydrochloric acid wash (1-part acid to 10 parts water) to remove all excess mortar residue for a suitable indistinguishable finish; Refer to landscape architectural drawings to determine finishing.

a) New weep holes shall be clear of all debris and mortar at the completion of works
- New Tiling**
- 40) Supply and install new tile direct adhered to membrane using **ARDEX X18** with **ARDEX E90** Additive;

a) Supply Owners Corporation with (3) tile samples that match existing colour. Tiles to be chosen by the Owners Corporation prior to signing of contract documents or thereafter;

b) Supply Owners Corporation with grout colouring samples for approval;

c) Supplied tiles shall be minimum R11 slip rating;

d) For tender purposes, the Contractor shall allow **\$100/m² + GST for the procurement of tiles.**
- 41) Skirting tiles to be installed where required to all floor to wall upturns;

Blank.

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY



JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	8

ITEM 4. BALCONY, COURTYARD AND WALKWAY WATERPROOFING

- 42) Allow to install control joints in the tile surfaces where required at maximum 4.5m centres and at logical intersections. Any structural screed control joints shall be reflected in the tile surface directly above (if any):

a) Use of preformed tile joint systems are recommended and shall be stainless-steel;
- 43) Tile grout shall be **ARDEX EG-15** epoxy grout or similar approved, installed in line with technical data sheets:

a) Tile grout colour to be confirmed by the Owners’ Corporation.
- Unit 2 Pergola**

44) Supply and install a new colourbond pergola with a like for like appearance and design.

a) Post fixings to be installed side mounted on concrete wall. Waterproofing to be detailed around fixings.
b) Contractor to provide design and shop drawings for approval prior to placing order.
c) Contractor to obtain structural certification from manufacturer.
- Painting Works**

Note: The Executive Committee is responsible for confirming façade Colour selections provided by the Contractor prior to works commencing. Approx. 4 weeks prior to coating application;

45) Allow to protect all pre-finished areas with drop sheets and masking tape as required;

46) Allow for temporary removal & reinstatement of any existing wall fixings, fittings, fixtures, downpipes to the balcony facades including balcony slab edges as required;

47) If applicable, install skim render as per Landscape Arch.

a) Where depth of render replacement thickness exceeds 10mm, contractor to advise superintendent for further instruction on product selection;

48) Apply an external grade acrylic paint coating as per Landscape Arch, or approved similar, to the balcony facades and soffits prepared and primed as required in accordance with the manufacturer’s instructions, *AS2311:2009 Guide to the Painting of Buildings*, and the drawings;

49) Reinstall and reconnect any affected services, façade fixings, fittings, fixtures, blinds, fly screens (if required) including make good of any affected items; and,

50) Provide a general builder’s clean to leave the area clean and tidy.

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY



JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	9

ITEM 5. DOOR REPLACEMENT		
LOCATION	Unit Entrances and Unit 2 Balcony Door at the subject property	Blank.
SCOPE INTENT	The scope intent of this work item is to: i. Installation of new compliant sliding door suites to the new sized door opening upon completion of the waterproofing works.	
EXTENT OF WORKS	For tendering purposes, The Contractor shall allow for a Lump Sum price for the scoped door replacement works.	
SCOPE OF WORKS & SPECIFICATION	Note: Works are to be staged in such a way that any openings in the building, are left unprotected for minimal time. Any occupant disruption shall be kept to a minimum All materials and products are to be installed in strict accordance with the product’s technical data sheets and manufacturer’s requirements. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. This Specification is to be read in conjunction with <u>Waterproofing Works Drawing Set</u>. <u>The Contractor shall:</u> 1) Coordinate safe access to the work areas at the property as per relevant <i>Item 1 – Preliminaries</i> section of this Specification document; 2) Coordinate works with other items within this Specification as required; 3) Ensure flashing has been installed correctly to head and sill flashing before door installation 4) Supply and install new fabricated “AWS” Architectural Series Commercial Grade Aluminium Sliding Door suites, or approved similar, to fit existing building openings to the terrace and matching existing building appearance as required; a) New door and window framing type and design to be submitted to the Owners for approval before commencing works; b) New sliding door suites are to meet current Australian Standards, National Construction Code (NCC), and strata building requirements. Specifically: i) Ultimate pressure: 1,800 Pa; ii) Serviceability pressure: 1,400 Pa; iii) Water pressure: 450 Pa; c) For tendering purposes, allow for clear 6.38mm thick laminated glazing; d) Door hardware and fixings shall be stainless steel unless noted otherwise; e) New door and window suites must include appropriate sill flashings installed or equivalent similar; f) Install backing rod and 3M flashing tape to both sides and head of glazing suite. g) Ensure that all products are installed in line with the manufacturer’s instructions; Note: It is the Contractor’s responsibility to ensure new door suites are fabricated to correctly fit the opening;	

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521 NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'. COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.	SCOPE OF WORKS FOR TENDER PURPOSES ONLY		JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
			PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
			PARTRIDGE REMEDIAL REFERENCE:	2025R0318
			DATE:	11 June 2026
			PAGE:	10

ITEM 5. DOOR REPLACEMENT

- 5) Install new aluminium storm mouldings of matching appearance, fixed and sealed on both rear faces to the frame and wall with a UV resistant sealant such as **Ardex RA 040** or approved similar;
- 6) Make good building internals if damaged from the removal and or reinstatement of the balcony/terrace door suites/systems, including patch painting if required;

a) **Allow for a provisional sum of \$1,800 + GST**
- 7) Existing gates to be replaced with a new like for like door (timber).
- 8) Provide a general builder’s clean to leave the area clean and tidy.

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY



JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	11

ITEM 6. REPLACEMENT OF BALUSTRADE		
LOCATION	Unit 2 Balcony and Common Stairs at the subject property	Blank.
SCOPE INTENT	The scope intent of this work item is to: i. Remove existing balustrading to the external balconies; and, ii. Install a new compliant balustrade system to the external balconies.	
EXTENT OF WORKS	For tendering purposes, The Contractor shall allow for a Lump Sum price for the scoped balustrading system installation works.	
SCOPE OF WORKS & SPECIFICATION	Note: Contractor to provide safety exclusion zones. Any occupant disruption shall be kept to a minimum. All materials and products are to be installed in strict accordance with the product's technical data sheets and manufacturer's requirements. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. This Specification is to be read in conjunction with <u>Waterproofing Works Drawing Set</u>. <u>The Contractor shall:</u> 1) Coordinate safe access to the work areas at the property as per relevant <i>Item 1 – Preliminaries</i> section of this Specification document; 2) Coordinate works with other items within this Specification as required; 3) Protect all areas adjacent to work areas; 4) Carry out a detailed site measure of the balcony and supply measurements to the Superintendent for the supply and installation of the new balustrade 5) Allow to remove and safely dispose of all existing balustrades to the balconies, including removal of any existing fixings (if any) into the concrete balcony slabs; 6) Allow to core out any existing steel bars, dowels or threads of the existing balustrade which may be in the concrete slab and fill all core holes flush with the surrounding surface in accordance with the <i>Concrete Spalling Repairs</i> section of this Specification document; 7) Allow to engage a concrete scanning contractor to locate any existing edge steel reinforcement to each balcony slab. The Contractor shall then provide concrete scanning report to Superintendent for review to avoid damage to any existing edge steel reinforcement bars; 8) Ensure balustrades are designed for the wind rating requirements for the site conditions. Installation of New Balustrade: 9) Following receipt of the Concrete Scanning Report, the Contractor shall set out new balustrade fixing locations: a) Edge distances to be in accordance with the manufacturer's technical datasheets and installation guidelines. b) Spacings of new balustrading posts shall be in accordance with the recommendations from <i>manufacturer</i> for certification: Note: Maximum Post spacings refer to conditions such as wind region, final balustrade height, building height, etc.;	

ITEM 6. REPLACEMENT OF BALUSTRADE

- Concrete hob Installation at Balcony Perimeter**
- 10) Construct a new hob – refer to *Waterproofing Works Drawing Set*.
- 11) Supply and install new compliant aluminium framed balustrade (**Railsafe R-D12** Clear Glass balustrading) in accordance with the structural loading requirements of *AS1170.2:2021 – Structural design actions, Part 2* and the manufacturer’s instructions;
- a) Balustrade style and colour to be submitted to the Owner’s Corporation for approval prior to work commencement;
 - b) Detail around balustrade post threaded rods in accordance with **ARDEX** manufacturers details and installation guidelines;
 - c) New balustrading system shall be designed nominally 1,050mm in height from the balcony Finished Floor Level (FFL) of each balcony;
- 12) The Contractor is to assume full responsibility for the assembly of the nominated balustrade;
- a) Contractor is responsible to provide structural design certification, installation certification and warranty documents by the manufacturer; and,
- 13) Provide a general builder clean and leave the site in a clean and tidy condition.
- Stairs**
- 14) Supply and install new compliant aluminium framed balustrade (**Railsafe R-D12** Clear Glass balustrading) in accordance with the structural loading requirements of *AS1170.2:2021 – Structural design actions, Part 2* and the manufacturer’s instructions;
- a) Balustrade style and colour to be submitted to the Owner’s Corporation for approval prior to work commencement;
 - b) Detail around balustrade post threaded rods in accordance with **ARDEX** manufacturers details and installation guidelines;
 - c) New balustrading system shall be designed nominally 1,050mm in height from the balcony Finished Floor Level (FFL) of each balcony;
- 15) The Contractor is to assume full responsibility for the assembly of the nominated balustrade;
- a) Contractor is responsible to provide structural design certification, installation certification and warranty documents by the manufacturer; and,
- 16) Provide a general builder clean and leave the site in a clean and tidy condition.

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY



JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	13

ITEM 7. BALUSTRADE WALL REPLACEMENT		
LOCATION	Unit 2 and Unit 3 at the subject property	Blank.
SCOPE INTENT	The scope intent of this work item is to: i. Installation of structural loading compliant concrete wall to replace existing non-compliant balustrade wall system.	
EXTENT OF WORKS	For tendering purposes, The Contractor shall allow for a Lump Sum price for the scoped balustrade wall works.	
SCOPE OF WORKS & SPECIFICATION	Note: Works are to be staged in such a way that any openings in the building, are left unprotected for minimal time. Any occupant disruption shall be kept to a minimum All materials and products are to be installed in strict accordance with the product’s technical data sheets and manufacturer’s requirements. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. This Specification is to be read in conjunction with <i>Remedial Works Drawing Set</i>. <u>The Contractor shall:</u> 1) Coordinate safe access to the work areas at the property as per relevant <i>Item 1 – Preliminaries</i> section of this Specification document; 2) Coordinate works with other items within this Specification as required; 3) Remove and dispose of the internal and external parapet brickwork skin; a) Install protection to the affected and surrounding external areas; 4) Install Abel Flex at any existing vertical surfaces. 5) Supply and install new 120mm thick wall for Unit 3 and 150mm thick wall for Unit 2 Balcony. a) Install galvanised N16 vertical reinforcing starter bars spaced at 200mm centres, Chemset into the concrete substrate with minimum 120mm embedment; b) Install galvanised N16 horizontal reinforcement at 200mm vertical spacing; c) Supply and install Ancon cavity frame ties at 400mm centres fixed into the external brick skin and built into block joints where required. 6) Supply and install soldier course brickwork to achieve a minimum height of 1,000mm from finished floor level; 7) Coat wall with two coats of Ardex 310 and 300. 8) Provide a general builder’s clean to leave the area clean and tidy.	

ITEM 8. BOUNDARY WALL REPLACEMENT		
LOCATION	Eastern Boundary Wall at the subject property	
SCOPE INTENT	The scope intent of this work item is to: i. Installation of structural loading compliant blockwork balustrade wall to replace existing boundary wall	
EXTENT OF WORKS	For tendering purposes, The Contractor shall allow for a Lump Sum price for the scoped balustrade wall works.	
SCOPE OF WORKS & SPECIFICATION	Note: Works are to be staged in such a way that any openings in the building, are left unprotected for minimal time. Any occupant disruption shall be kept to a minimum All materials and products are to be installed in strict accordance with the product's technical data sheets and manufacturer's requirements. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. This Specification is to be read in conjunction with <u>Remedial Works Drawing Set</u>. <u>The Contractor shall:</u> - Coordinate safe access to the work areas at the property as per relevant <i>Item 1 – Preliminaries</i> section of this Specification document; - Coordinate works with other items within this Specification as required; - Contractor to provide survey to confirm boundary line. Contractor to ensure new works do not encroach into neighbouring boundary. - Remove and dispose of the internal and external parapet brickwork skin; - Install protection to the affected and surrounding external areas; Install Abel Flex at any existing vertical surfaces. - Supply and install new 190mm wide core filled (f'c 25 MPa) block wall. - Install galvanised N16 vertical reinforcing starter bars spaced at 200mm centres, Chemset into the concrete substrate with minimum 120mm embedment; - Install galvanised N12 horizontal reinforcement at 400mm vertical spacing; - Coat wall with two coats of Ardex 310 and 300. - Contractor to install colourbond privacy lattice structure along eastern boundary. Colour to be confirmed by owners. Screen to be as per Landscape Architect design. Provisional Sum allowance of \$10,000 + GST - Provide a general builder's clean to leave the area clean and tidy.	

Blank.

ITEM 9. CONCRETE SPALLING REPAIRS		
LOCATION	Any external concrete surfaces on the balconies, slab edges, common area stairs, and common area walkway where concrete spalling is identified.	SPALLING CONCRETE REMEDIAL WORKS METHOD STATEMENT 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. Install temporary props if considered necessary by the Superintendent. Remove all cracked and loose concrete until good sound alkaline concrete is reached, at least 50mm beyond the end of any corroded reinforcing bar. Scabble concrete behind/beneath all bars requiring treatment, thus fully exposing the bar. Where the cover to the reinforcement at the exposed areas is found to be less than 30mm, the concrete should be broken out to expose the existing reinforcement further until the existing cover to the reinforcement is found to be approximately 30mm. Do NOT break out the concrete more than a distance of 1000mm from the original area of exposed reinforcement – Ask the Superintendent for further instructions before proceeding further. SI Carefully breakout further, and/or mechanically scabble the concrete beneath/behind the existing reinforcement bars to enable the existing reinforcement to either be bent down to achieve a minimum cover of 30mm, or alternatively cut-out and replaced with galvanised N12 bars at 100 centres (to be confirmed upon exposure of the existing reinforcement by the SI). New bars to be lapped with the existing 300mm. Cut edge of repair area to a straight depth of 10mm to avoid feathering and 20mm behind any exposed reinforcement to allow repair mortar to bind to reinforcement. Remove all rust from the existing reinforcing bars by electric grinder until bare metal is exposed and the surface is clean and free from all traces of grease and oil, rust and mill scale, apply a coating approximately 0.5 – 1.0mm thick of Ardex BR 10 ZP, using a stiff paintbrush, roller or spray gun. Leave to dry for 2 – 3 hours (at an ambient temperature of 20°C), then apply a second coat of similar thickness. If upon exposure, more than 20 percent of the steel cross sectional area has been reduced or as directed by the Superintendent, fix an additional galvanised N12 bar lapped 300mm onto sound reinforcement and prime as above. SI If the substrate is wet/ damp, then apply a bonding coat not less than 0.5mm thick of Ardex BRP 30 EP, working the bonding slurry well into the substrate to ensure complete coverage of all surface irregularities. Apply freshly mixed Ardex BR 345 while the concrete primer/bonding coat is still tacky i.e. wet on wet application, to the ‘Patch repair’ areas, in order to achieve the minimum of 30mm cover over the reinforcement SI. The surface is to be finished to match the texture and finish of the existing surrounding concrete finish. Cure the repair mortar by applying an approved patented curing compound. Note: SI indicates times when Superintendent to be notified for inspections. <i>Ardex BR 10 ZP, Ardex WR PRIME and Ardex BR 345 are manufactured by Ardex Australia Pty Ltd and should be prepared and installed in accordance with the manufacturer's instructions and recommendations.</i>

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521 NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'. COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.	SCOPE OF WORKS FOR TENDER PURPOSES ONLY	PARTRIDGE	JOB TITLE: Remedial Building Works – Waterproofing Works and Other Works
			PROPERTY ADDRESS: 22 Battery Street, Coogee NSW 2034
			PARTRIDGE REMEDIAL REFERENCE: 2025R0318
			DATE: 11 June 2026
			PAGE: 16

ITEM 9. CONCRETE SPALLING REPAIRS		
	Allowance to establish a suitably qualified specialist welding tradesmen and his associated equipment on the site to undertake the welding; and, 12) Where it is necessary to terminate a replacement steel reinforcing bar by drilling and bonding the reinforcing steel into a drill hole, seek instructions from the Superintendent or structural engineer.	

ITEM 10. EXTERNAL MASONRY CRACK REPAIRS		
LOCATION	External brick walls wherever cracks are identified	
SCOPE INTENT	The scope intent of this work item is to: i. Carry out crack stitching repairs to the brick wall wherever the cracks are evident	
EXTENT OF WORKS	The Contractor shall allow for a Lump Sum price for a Provisional Quantity of 50 Lineal Metres of external crack stitching repairs as per the specification method below.	
SCOPE OF WORKS & SPECIFICATION	All materials and products are to be installed in strict accordance with the product's technical data sheets and manufacturer's requirements. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. The contractor is to ensure that mortar colour, bricks, and finish match existing and provide the owner's committees with samples for approval prior to work. <u>The Contractor shall:</u> 1) Coordinate safe access to the work areas at the property as per <i>ITEM 1 – PRELIMINARIES</i> section of this Specification; 2) Coordinate works with other items within this Specification as required; 3) Allow for any temporary removal & reinstatement of any existing external downpipes or façade fittings, if required to carry out the works; <u>Crack Stitching repair</u> 4) Seal along the full height of the vertical crack with a proprietary UV stable flexible sealant with a colour to match the brickwork; 5) Carry out crack stitching repairs to damaged vertical cracking sections of the external brickwork, as directed by the Superintendent using stainless steel HeliFix HeliBars, or approved similar, in accordance with Manufacturer's Instructions and Technical Data Sheets/Installation Guides: a) OPTION 1: Seal along the vertical cracks in bricks with a proprietary UV stable flexible sealant with a colour to match the brickwork; b) OPTION 2: Dispose of cracked bricks and supply and install new matching bricks. 6) The Contractor shall allow to reinstate and or replace any damaged, loose or missing bricks with matching bricks as close as practically possible. Mortar shall be colour-matched as best possible if required; 7) Provide a general builder clean and leave the site in a clean and tidy condition.	

Blank.

ITEM 11. REPLACEMENT OF NORTHERN WALKWAY SLAB		
LOCATION	Walkway connecting main walkway on North to common area on lower ground floor	Installation of New walkway Slab 13) Around the entire perimeter of the new 200mm concrete slab set out the finished level of the concrete and install Abelflex expansion joint flush with the top finished surface of the new slab. 14) Where the new concrete abuts the existing concrete walkway, allow to install 600mm long N12 galvanised dowels @ 400mm c/c. Dowels are to be drilled horizontal and at slab mid-depth and epoxy fixed 200mm into the existing concrete. a) Allow to slab scan the existing concrete slab to ensure newly installed dowels do not interfere with the existing driveway reinforcement; 15) Supply and install N16-200 top and bottom each way with 40mm cover over 0.2mm polythene vapour barrier and 50mm deep road base layer. ENGINEERING HOLDPOINT: Superintendent to inspect the reinforcement 16) Supply and lay 32 MPa concrete with a wood float finish similar to existing. Ensure 1:100 min fall to the Stormwater Pits and downward sloping existing slab 17) Allow to install expansion joints every 4m 18) Allow to neatly cut control joints every 4m to the newly installed concrete slab; 19) Apply new tiles and screed on top of concrete (tiles to match waterproofed walkway tiles) 20) Allow to make good and repaint any damaged areas. a) Any gaps in the façade are to be repaired and repainted; 21) Reinstate all services; 22) Provide general builder’s clean and leave the area clean and tidy.
SCOPE INTENT	The scope intent of this work item is to: i. Demolish the existing walkway slab. ii. Construct new walkway slab.	
EXTENT OF WORKS	For tendering purposes, the Contractor shall allow for a lump sum price for the demolition of the existing walkway slab and installation of the new walkway slab.	
SCOPE OF WORKS & SPECIFICATION	Note: Works are to be staged in such a way that any openings in the building, are left unprotected for minimal time. Any occupant disruption shall be kept to a minimum. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. The contractor to obtain any permits required to undertake the works. The contractor to engage a Geotechnical engineer to advise on the location of the safe working batter and confirmation of the soil compaction level. <u>The Contractor shall:</u> 1) Coordinate safe access to the work areas at the property as per <i>ITEM 1 – PRELIMINARIES</i> section of this Specification; 2) Coordinate works with other items within this Specification as required; 3) Allow to protect all surfaces in the work zone and provide appropriate measures to prevent excessive dust; 4) Allow for a clean cut at existing concrete slab and allow to jackhammer any remaining concrete; a) Remove and dispose of the concrete walkway slab Preparation 5) Coordinate safe access to the work areas at the property as per relevant Item 1 – Preliminaries section of this Specification document; 6) Coordinate works with other items within this Specification as required; 7) Allow to protect all surfaces in the work zone and provide appropriate measures to prevent excessive dust; 8) Remove and dispose of the concrete driveway slab at areas indicated in Detail 2.1; a) Allow for clean cut at existing concrete slab and allow to jackhammer any remaining concrete; 9) Level the exposed soil and remove any clean fill to be at the required level appropriate for new concrete works; Soil Compaction 10) Level the exposed soil and remove any clean fill to be at the required level appropriate for new concrete works; 11) Allow to supply and install a minimum of 100mm thick ‘DGB 20’ Sub-base topping to the existing soil; 12) Allow to compact ground to achieve subgrade compacted to 95% STD and base course compacted to 98% MOD and be at the required level; a) Contractor to ensure compaction to be conducted by hand compacting equipment only	

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521 NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'. COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.	SCOPE OF WORKS FOR TENDER PURPOSES ONLY		JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
			PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
			PARTRIDGE REMEDIAL REFERENCE:	2025R0318
			DATE:	11 June 2026
			PAGE:	19

ITEM 12. OTHER WORKS		
LOCATION	Areas where Landscaping works are required.	
SCOPE INTENT	The scope intent of this work item is to: i. Landscaping Works as per Landscape Arch Documents.	
SCOPE OF WORKS & SPECIFICATION	Note: Works are to be staged in such a way that any openings in the building, are left unprotected for minimal time. Any occupant disruption shall be kept to a minimum. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. Contractor to obtain any permits required to undertake the works. Contractor to engage a Geotechnical engineer to advise on the location of the safe working batter and confirmation of the soil compaction level. <u>The Contractor shall:</u> 1) Coordinate safe access to the work areas at the property as per <i>ITEM 1 – PRELIMINARIES</i> section of this Specification; 2) Coordinate works with other items within this Specification as required; 3) Allow to protect all surfaces in the work zone and provide appropriate measures to prevent excessive dust;	

Blank

ITEM 13. WINDOW REPLACEMENT		
LOCATION	All windows at the subject property	
SCOPE INTENT	The scope intent of this work item is to: i. Replace all existing window suites with new wind and water pressure rating compliant window suites.	
EXTENT OF WORKS	For tendering purposes, The Contractor shall allow for a Lump Sum price for the scoped window replacement works.	
SCOPE OF WORKS & SPECIFICATION	Note: Works are to be staged in such a way that any openings in the building, are left unprotected for minimal time. Any occupant disruption shall be kept to a minimum. All materials and products are to be installed in strict accordance with the product’s technical data sheets and manufacturer’s requirements. The Contractor shall liaise with material suppliers to ensure compliance with the installation of their products and relevant warranties provided. Individual lot owners may elect to upgrade installed components (e.g. double-glazing or acoustic glass). Any individual upgrade costs will be between the Owners and the nominated Contractor. <u>The Contractor shall:</u> 1) Coordinate safe access to the work areas at the property as per relevant <i>ITEM 1 – PRELIMINARIES</i> and <i>ITEM 3 – ACCESS</i> sections of this Specification document; 2) Coordinate works with other items within this Specification as required; 3) Remove and dispose of the existing aluminium window suites; HOLD POINT – Superintendent to inspect existing window lintel; Head and Sill Flashings 4) Remove 3 courses of bricks above the externals windows to allow for the installation of new head flashings and window lintels; a) All to install brickwork props if/as required; b) Clean any debris in the cavity and remove any flashing materials (if exist); 5) Supply and install new Alcor head flashings above window openings, in accordance with current <i>NCC</i>, <i>AS3700</i> and <i>AS2904</i> requirements; a) Note: Head flashings are only to be installed where the window where the two course brick upturn can be achieved. 6) Remove one course of existing sill bricks to allow for the installation of sill flashings; a) All to install brickwork props if/as required; b) Clean any debris in the cavity and remove any flashing materials (if exist); 7) Supply and install new Alcor sill flashings below window openings, in accordance with current <i>NCC</i>, <i>AS3700</i> and <i>AS2904</i> requirements: a) Head and sill flashings to extend minimum 150mm either side of opening. b) Head and sill flashing shall be installed and embedded into internal masonry skin. c) Head flashing shall be turned up minimum two courses of brick in cavity and terminated at each end.	

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521 NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'. COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.	SCOPE OF WORKS FOR TENDER PURPOSES ONLY		JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
			PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
			PARTRIDGE REMEDIAL REFERENCE:	2025R0318
			DATE:	11 June 2026
			PAGE:	21

ITEM 13. WINDOW REPLACEMENT

- d) Sill flashing shall be turned up minimum one course of brick in cavity and terminated at each end.

e) Head and sill flashing shall extend through to the external masonry skin so it is visible on the external my nominal 20mm and cut flush at completion of installation. Flashing must remain visible.

f) New PVC weep holes shall be installed above the head flashing at minimum 1,200mm centres installed uniformly above each opening.
- 8) Reinstate existing bricks if salvaged or replace removed bricks with new bricks similar to existing;

9) Install new mortar of exposure class M4.

a) Owners to select mortar colour and raked or flush finish prior to installation;
- Lintel Installation (only where not adjacent concrete slab above)

10) Remove and dispose of nominated external dilapidated window lintels;

HOLD POINT – Superintendent to inspect the wall cavity and substrate;

11) Supply and install new grade external galvanised steel lintels where required to nominated external windows, suitable for exposure conditions, in accordance with AS3700 and AS2699.3;

a) Window Lintels to adhere to the following opening and bearing guidelines:

i) Greater than 1.5m opening – 100x100x10 EA angle bear 150mm ends.

ii) 1.2 to 1.5m opening – 100x100x8 EA angle bear 150mm ends.

iii) 1.0 to 1.2m opening – 100x75x8 EA angle bear 150mm ends.

12) Reinstate existing bricks if salvaged or replace removed bricks with new bricks to match existing;

13) Install new mortar of exposure class M4 and colour matched to suit existing mortar colour and finish as close as possible; and,

14) Remove prop as required

Brickwork Reconstruction Around Windows

15) The Contractor shall allow to conduct a Provisional Allowance of 100m² of brickwork repairs;

16) Identify and locate all exfoliating, fretting, dilapidated and or damaged bricks on the external façades of the property. Confirm number of bricks to be removed with Superintendent for instruction.

17) Remove damaged bricks nominated by the Superintendent and clean the mortar joints to make free of dust and debris with compressed air or brushed as required;

18) Install new bricks with new mortar of exposure class M4;

a) New bricks and mortars to match with the existing colour and finish as close as possible;

b) Ensure that the correct volume of sand is procured for each façade to maintain consistency of colour;

c) The new mortar shall be built up in several passes during reinstatement;

d) Allow new mortar to dry naturally prior to completing any other remedial works within the area which could affect the repaired brickwork.

19) Make good any affected brick skins and mortar joints;

Window Installation:

20) Supply and install new fabricated aluminium window suites to fit existing building openings matching existing building appearance as required;

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY

JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	22

ITEM 13. WINDOW REPLACEMENT

- a) Final window schedule to be submitted to Owner’s Corporation for approval prior to manufacturing;
 - b) Window frames shall include a sub-sill and storm mould and shall be supplied to comply with the following design specifications:
 - i) Serviceability pressure: **1,150 Pa**;
 - ii) Ultimate pressure: **1,600 Pa**;
 - iii) Water pressure: **400 Pa**;
 - c) Powder coated finish in **Dulux Duratec** powder coating system to match existing colour and texture;
 - d) Ensure that window head, sill and jamb flashings are installed correctly prior to installation of the window suite(s);
 - e) Ensure that fixings are not installed through the head or sill of the new window frames.
 - f) Install backing rod and 3M flashing tape around top and sides of glazing suites.
 - g) Hardware and related components shall be grade 316 stainless steel, unless noted otherwise;
- Note:** Windows shall be designed and installed in accordance with *AS1170.2, AS1288, AS2047, NCC, and AWA Installation of Residential Windows guide requirements*;
- 21) All new supplied windows shall include restrictors or child safety locks in accordance with the current *NCC and Stata Scheme and Management Act*;
 - 22) Seal window frames and junctions between windows and brickwork with UV resistant sealant such as **Ardex RA 040**, or approved similar;
 - a) Prior to sealing works, prepare surface to be free of any dust, grease, oil and any contaminants;
 - 23) Make good building internals if damaged from the removal and or reinstatement of the window suites/systems, including patch painting if required to match existing:
 - a) MDF is not to be used for any internal make good works.
 - b) For tender purposes, allow a **Provisional Sum of \$1,200 + GST per window suite** for internal repairs.
 - 24) Contractor is responsible to provide structural design, compliance certification for the new windows suites by the manufacturer,
 - a) Contractor to provide supplementary document(s) which indicates the windows have been designed for the location in which they are installed;
 - 25) Contractor to provide manufacturer warranty documentations and a maintenance plan for the new window suites; and,
 - 26) Provide a general builder’s clean and leave site clean and tidy.

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521

NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'.

COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.

SCOPE OF WORKS
FOR TENDER PURPOSES ONLY



JOB TITLE:	Remedial Building Works – Waterproofing Works and Other Works
PROPERTY ADDRESS:	22 Battery Street, Coogee NSW 2034
PARTRIDGE REMEDIAL REFERENCE:	2025R0318
DATE:	11 June 2026
PAGE:	23

ITEM 14. MATERIAL TECHNICAL DATA SHEETS

MATERIALS
ARDEX WPM 300
ARDEX WPM 1000
ARDEX WPM 310
ARDEX WPM 405
ARDEX RA040
ARDEX A46
ARDEX WA 98
ARDEX X18
ARDEX E90
ARDEX FG-8
ARDEX CA 20P
ARDEX BR 10 ZP
ARDEX BR 345
ARDEX BRP 30 EP

APPENDIX A-

WATERPROOFING DRAWINGS

PARTRIDGE REMEDIAL PTY LTD ABN 89 145 990 521 NOTE: THE CONTRACTOR SHALL NOTIFY THE SUPERINTENDENT OF ANY CONFLICT, ERROR OR OMISSION REGARDING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS' PRIOR TO TENDER SUBMISSION. FAILING TO NOTIFY THE SUPERINTENDENT IS DEEMED AS ACCEPTING THE 'SCOPE INTENT' AND 'SCOPE OF WORKS'. COPYRIGHT: THE DESIGN AND DETAILS SHOWN ON THIS DOCUMENT ARE SPECIFIC TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART OR TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF PARTRIDGE REMEDIAL PTY LTD.	SCOPE OF WORKS FOR TENDER PURPOSES ONLY		JOB TITLE: PROPERTY ADDRESS: PARTRIDGE REMEDIAL REFERENCE: DATE: PAGE:	Remedial Building Works – Waterproofing Works and Other Works 22 Battery Street, Coogee NSW 2034 2025R0318 11 June 2026 25
---	--	---	--	---